

VOLTAGE RANGE: 30V
CURRENT: 300mA

Features


- Low forward voltage
- Hermetically-sealed leaded glass package

Mechanical Data

- Case: DO-35, glass case
- Polarity: Color band denotes cathode
- Weight: 0.004 ounces, 0.13 grams



DO-35(GLASS)

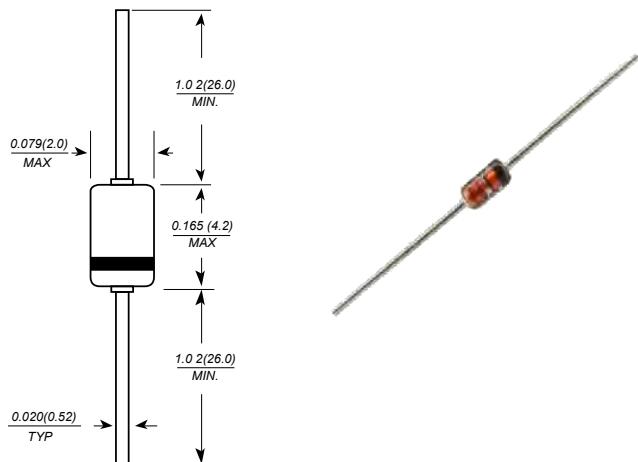

Dimensions in millimeters

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous Reverse Voltage	V_R	30	V
Continuous Forward Current	I_F	200	mA
Average Forward Current	$I_{F(AV)}$	200	mA
Repetitive Peak Forward Current	I_{FRM}	300	mA
Non-Repetitive Peak Forward Current	I_{FSM}	5	A
Thermal Resistance from Junction to Ambient	R_{thja}	320	K/W
Operating Ambient Temperature	T_{amb}	- 65 to + 125	$^\circ\text{C}$
Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_S	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 0.1 \text{ mA}$	V_F	240	mV
at $I_F = 1 \text{ mA}$	V_F	320	mV
at $I_F = 10 \text{ mA}$	V_F	400	mV
at $I_F = 30 \text{ mA}$	V_F	500	mV
at $I_F = 100 \text{ mA}$	V_F	800	mV
Reverse Current at $V_R = 25 \text{ V}$	I_R	2	μA
Diode Capacitance at $V_R = 1 \text{ V}, f = 1 \text{ MHz}$	C_d	10	pF
Reverse Recovery Time at $I_F = 10 \text{ mA}, I_R = 10 \text{ mA}, R_L = 100 \Omega$	t_{rr}	4	ns



SUMMATEC

FIG.1 – ADMISSIBLE POWER DISSIPATION VS. AMBIENT TEMPERATURE

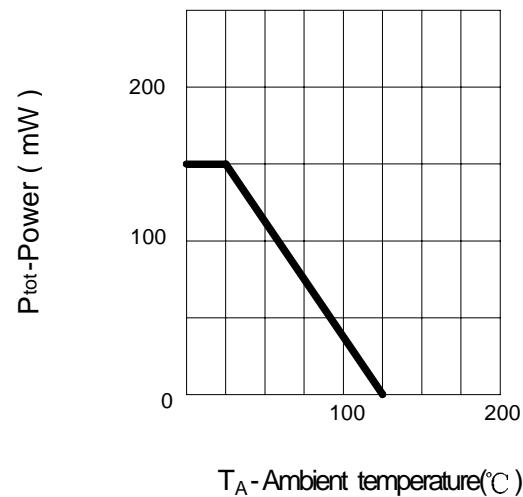


FIG. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

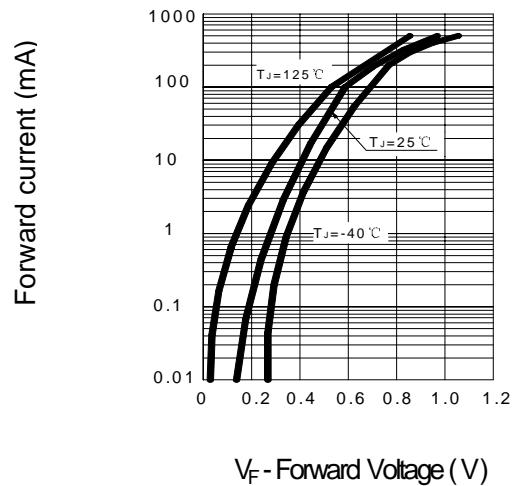


FIG. 3 – TYPICAL REVERSE CHARACTERISTICS

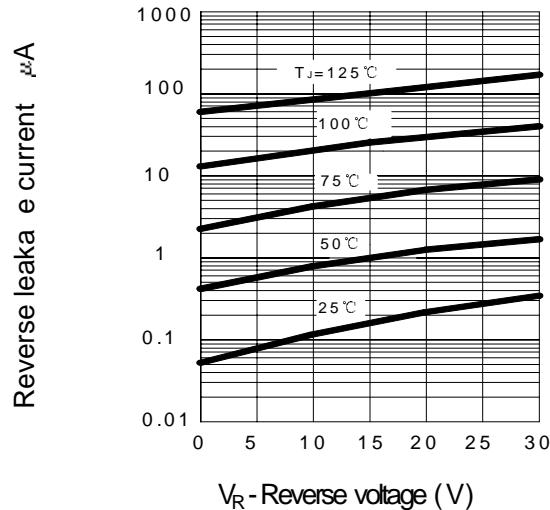


FIG.4 – TYPICAL JUNCTION CAPACITANCE

