

**VOLTAGE RANGE: 40 V**  
**CURRENT: 350mA**

### Features


- For general purpose applications
- These diodes feature very low turn-on voltage and fast switching. These devices are protected by a PN junction guard ring against excessive voltage, such as electrostatic discharges.

### Mechanical Data

- Case: DO-35, glass case
- Polarity: Color band denotes cathode
- Weight: 0.004 ounces, 0.13 grams



### DO-35(GLASS)

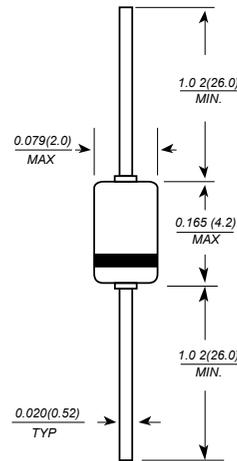

Dimensions in millimeters

### Maximum Ratings and Thermal Characteristics (Rating at 25 °C ambient temperature unless otherwise specified.)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	40	V
Continuous Forward Current	$I_F$	350 <sup>(1)</sup>	mA
Repetitive Peak Forward Current at $t_p < 1s$ ,	$I_{FRM}$	1 <sup>(1)</sup>	A
Forward Surge Current at $t_p < 10ms$ ,	$I_{FSM}$	7.5 <sup>(1)</sup>	A
Power Dissipation, $T_a = 65\text{ }^\circ\text{C}$	$P_D$	330 <sup>(1)</sup>	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	300 <sup>(1)</sup>	$^\circ\text{C/W}$
Junction Temperature	$T_J$	125	$^\circ\text{C}$
Ambient Operating Temperature Range	$T_a$	-65 to + 125	$^\circ\text{C}$
Storage temperature range	$T_S$	-65 to + 150	$^\circ\text{C}$

Note: (1) Valid provided that leads at a distance of 4mm from case are kept at ambient temperature.


### Electrical Characteristics ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 100\ \mu\text{A}$ (pulsed)	40	-	-	V
Reverse Current	$I_R$	$V_R = 10\ \text{V}$	-	-	2	$\mu\text{A}$
Pulse Test $t_p < 300\ \mu\text{s}$ , $\delta < 2\%$		$V_R = 20\ \text{V}$	-	-	5	
		$V_R = 40\ \text{V}$	-	-	25	
Forward Voltage	$V_F$	$I_F = 1\ \text{mA}$	-	-	0.30	V
Pulse Test $t_p < 300\ \mu\text{s}$ , $\delta < 2\%$		$I_F = 10\ \text{mA}$	-	-	0.40	
		$I_F = 30\ \text{mA}$	-	-	0.50	
		$I_F = 100\ \text{mA}$	-	-	0.75	
		$I_F = 500\ \text{mA}$	-	-	0.90	
Diode Capacitance	$C_d$	$V_R = 1\ \text{V}$ , $f = 1\ \text{MHz}$	-	12	-	pF




## RATING AND CHARACTERISTIC CURVES (BAT48)

**Admissible Power Dissipation vs. Ambient Temperature**

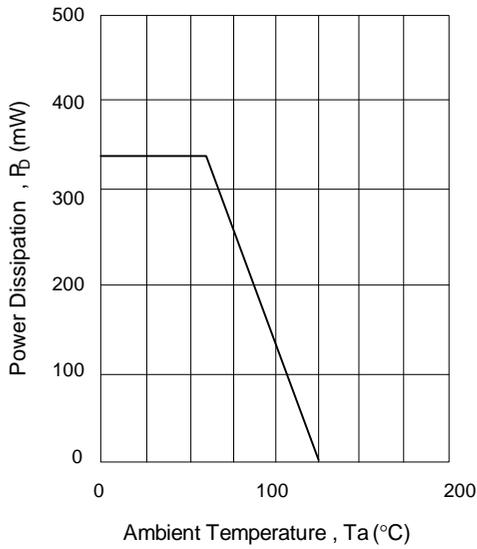

**Typical Forward Characteristics**

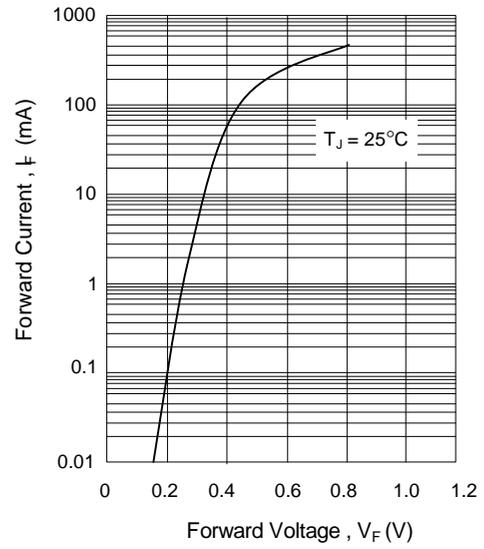

**Typical Reverse Characteristics**

