

VOLTAGE RANGE: 30 - 40V


CURRENT: 3.0 A

Features

- Low power loss, high efficiency
- Low profile surface mount package
- Built-in strain relief
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Guardring for overvoltage protection
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0

Mechanical Data

- Case: SMA/DO-214AC, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.064 grams (approx.)

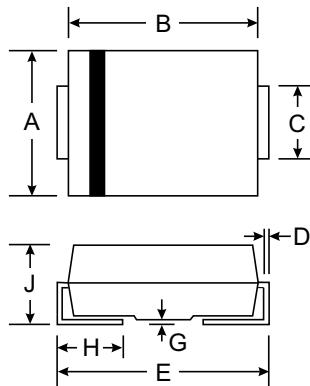

| SMA(DO-214AC) | | |
|---------------|------|------|
| Dim | Min | Max |
| A | 2.29 | 2.92 |
| B | 4.00 | 4.60 |
| C | 1.27 | 1.63 |
| D | 0.15 | 0.31 |
| E | 4.80 | 5.59 |
| G | 0.10 | 0.20 |
| H | 0.76 | 1.52 |
| J | 2.01 | 2.62 |

All Dimensions in mm

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

| Parameter | Symbol | B330LA | B340LA | Unit |
|--------------------------------------------------------------------------------------------------|------------------------------------|-------------|--------|------------------------|
| Device marking code | | B33 | B34 | V |
| Maximum repetitive peak reverse voltage | V_{RRM} | 30 | 40 | V |
| Maximum RMS voltage | V_{RMS} | 21 | 28 | V |
| Maximum DC blocking voltage | V_{DC} | 30 | 40 | V |
| Maximum average forward rectified current at T_L (See Fig. 1) | $I_{F(AV)}$ | 3.0 | | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 65 | | A |
| Typical thermal resistance ⁽²⁾ | $R_{\theta JA}$ $R_{\theta JL}$ | 110 28 | | $^\circ\text{C/W}$ |
| Voltage rate of change (rated V_R) | dv/dt | 10,000 | | $\text{V}/\mu\text{s}$ |
| Operating junction temperature range | T_J | -65 to +150 | | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | -65 to +150 | | $^\circ\text{C}$ |

| Parameter | Symbol | Max. | Max. | Unit |
|------------------------------------------------------------------------|--------|------|------|------|
| Maximum instantaneous forward voltage at 3.0A ⁽¹⁾ | V_F | 0.50 | 0.55 | V |
| Maximum DC reverse current at rated DC blocking voltage ⁽¹⁾ | I_R | 0.5 | 0.5 | mA |

Notes: (1) Pulse test: 300μs pulse width, 1% duty cycle

(2) Aluminum substrate mounted



SUNMATE

Fig. 1 – Forward Current Derating Curve

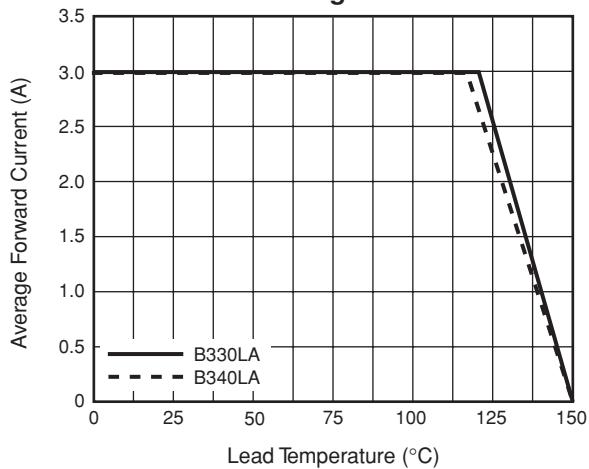


Fig. 3 – Typical Instantaneous Forward Characteristics

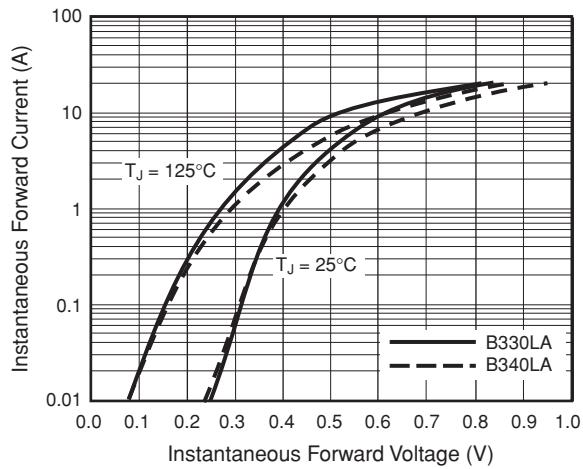


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

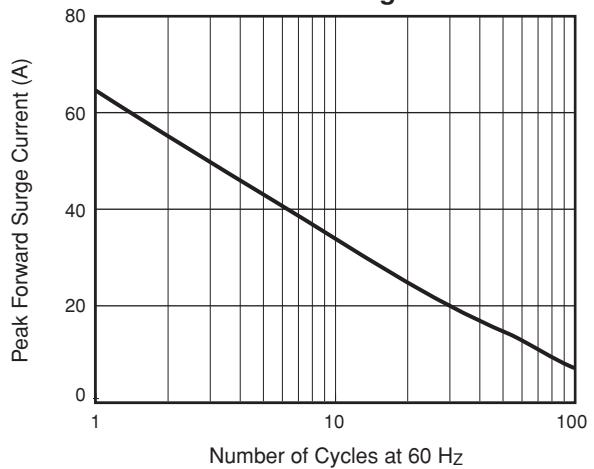


Fig. 4 – Typical Reverse Characteristics

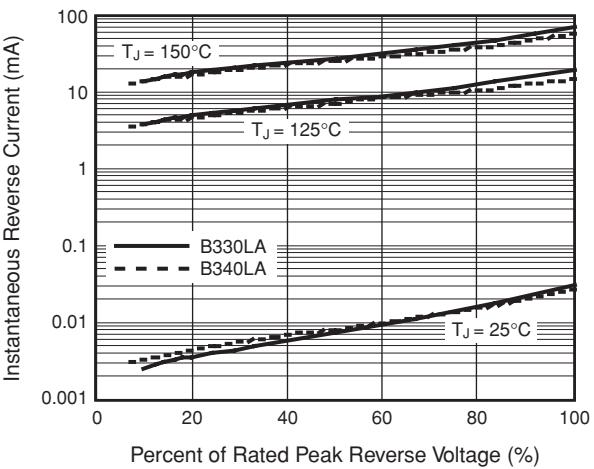


Fig. 5 – Typical Junction Capacitance

