


High photosynthesis (H)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
3.0	2.2	0.8	1.6
3.5	2.2	1.3	1.6
4.0	3.0	1.0	1.9
4.5	3.5	1.0	1.9
5.0	3.0/4.0	2.0/1.0	1.9
5.5	3.5/4.5	2.0/1.0	1.9
6.0	4.0	2.0	1.9
6.5	4.5	2.0	1.9

ASSEMBLY

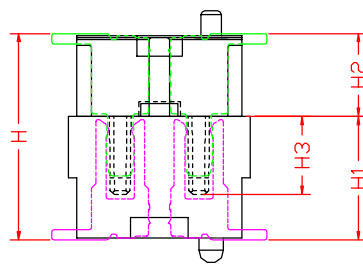

Ordering Information


SGDBM-05- XXXP- HXX

F=Female PITCH NO. of pins The female or Male seat height (H1 or H2)
M=Male 05=0.5mm 008*100pin 10=1.0mm
08=0.8mm 20=2.0mm
30=3.0mm
35=3.5mm
40=4.0mm
45=4.5mm

您正在使用




ZwCAD 2007 试用版

详情请查阅WWW.ZwCAD.COM



Electrical:
Vlotag Rating:50V AC(rms)/DC
Current Rating:0.5A AC(rms)/DC
Contact Resistance:50mΩ Max
Insulation Resistance:100MΩ min
Dielectric Withstanding Voltage:200V AC r. m. s
Operting Temperature:-30℃~+80℃
Materirls
Housing:High Temperature Plastic
UL94V-0
Terminal:Copper Alloy
Material:PA9T
Contact:phosphor Bronae, Gold Plating;

NO. of Contacts	Dimension (mm)			
	A±0.10	B±0.10	C±0.10	D±0.10
8	4.70	1.50	3.40	2.40
10	5.20	2.00	3.90	2.90
12	5.70	2.50	4.40	3.40
14	6.20	3.00	4.90	3.90
16	6.70	3.50	5.40	4.40
18	7.20	4.00	5.90	4.90
20	7.70	4.50	6.40	5.40
22	8.20	5.00	6.90	5.90
24	8.70	5.50	7.40	6.40
26	9.20	6.00	7.90	6.90
28	9.70	6.50	8.40	7.40
30	10.20	7.00	8.90	7.90
32	10.70	7.50	9.40	8.40
34	11.20	8.00	9.90	8.90
36	11.70	8.50	10.40	9.40
38	12.20	9.00	10.90	9.90
40	12.70	9.50	11.40	10.40
42	13.20	10.00	11.90	10.90
44	13.70	10.50	12.40	11.40
46	14.20	11.00	12.90	11.90
48	14.70	11.50	13.40	12.40
50	15.20	12.00	13.90	12.90
52	15.70	12.50	14.40	13.40
54	16.20	13.00	14.90	13.90
56	16.70	13.50	15.40	14.40
58	17.20	14.00	15.90	14.90
60	17.70	14.50	16.40	15.40
62	18.20	15.00	16.90	15.90
64	18.70	15.50	17.40	16.40
66	19.20	16.00	17.90	16.90
68	19.70	16.50	18.40	17.40
70	20.20	17.00	18.90	17.90
72	20.70	17.50	19.40	18.40
74	21.20	18.00	19.90	18.90
76	21.70	18.50	20.40	19.40
78	22.20	19.00	20.90	19.90
80	22.70	19.50	21.40	20.40
82	23.20	20.00	21.90	20.90
84	23.70	20.50	22.40	21.40
86	24.20	21.00	22.90	21.90
88	24.70	21.50	23.40	22.40
90	25.20	22.00	23.90	22.90
92	25.70	22.50	24.40	23.40
94	26.20	23.00	24.90	23.90
96	26.70	23.50	25.40	24.40
98	27.20	24.00	25.90	24.90
100	27.70	24.50	26.40	25.40

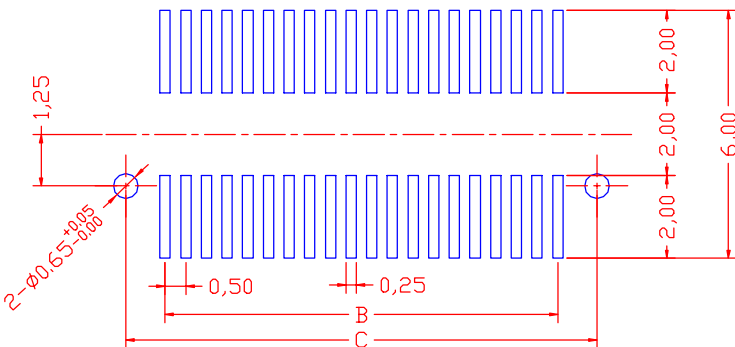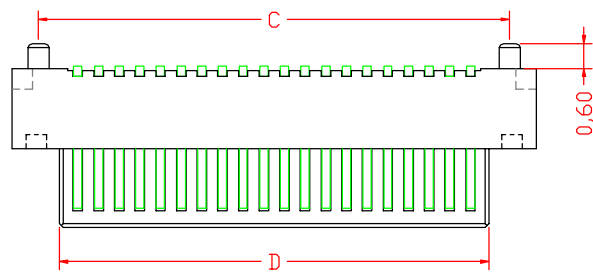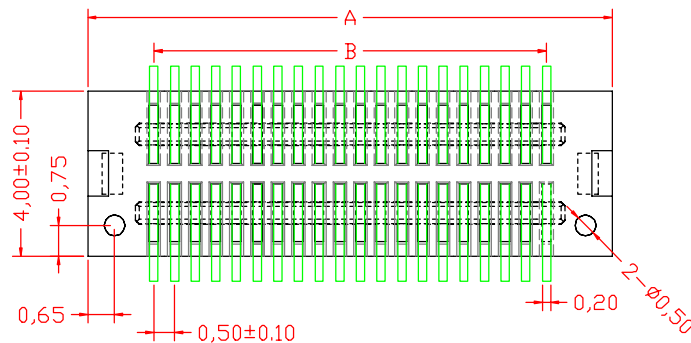

P. C. B PATTEN

单位	M M	尺寸公差	
日期	14.08.30	.0 0 0	±0.05
比例	1:1	.0 0	±0.10
		.0	±0.20
绘制		角度公差	
校对		.0	±1°
审核		.0 0	±0.5°
		视角	☉

深圳市山谷道电子有限公司

电话: 0755-27759859

传真: 0755-27759850

物料编号	SGDBM-05-XXXP-HXX		
品名	0.5mm BOARD TO BOARD 公座 双槽 立贴式		
包装规格	卷带1000PCS/R	图号	xx001