


**VOLTAGE RANGE: 50 - 1000V**  
**CURRENT: 0.3 A**






### Features

- Low profile space
- Ideal for automated placement
- Glass passivated chip junctions
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering  
260°C/10 seconds at terminals

### Mechanical Data

- Case: JEDEC SOD-123FL molded plastic body over passivated chip
- Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight:0.0007 ounce, 0.02 grams



SOD-123FL			
Dim	Min	Max	Typ
A	3.58	3.72	3.65
B	2.72	2.78	2.75
C	1.77	1.83	1.80
D	1.02	1.08	1.05
E	0.097	1.03	1.00
H	0.13	0.17	0.15
L	0.53	0.57	0.55
All Dimensions in mm			

### Maximum Ratings and Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	DSR 03A	DSR 03B	DSR 03D	DSR 03G	DSR 03J	DSR 03K	DSR 03M	Unit
	Marking	03A	03B	03D	03G	03J	03K	03M	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at T <sub>A</sub> =65°C (NOTE 1)	I <sub>(AV)</sub>	0.3							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) T <sub>L</sub> =25°C	I <sub>FSM</sub>	15.0							A
Maximum instantaneous forward voltage at 0.3A	V <sub>F</sub>	1.1							V
Maximum DC reverse current at rated DC blocking voltage T <sub>A</sub> =25°C T <sub>A</sub> =100°C	I <sub>R</sub>	5.0 50.0							μA
Typical junction capacitance (NOTE 2)	C <sub>J</sub>	4							pF
Typical thermal resistance (NOTE 3)	R <sub>θJA</sub>	220							K/W
Operating junction and storage temperature range	T <sub>J</sub> /T <sub>STG</sub>	-55 to +150							°C


Note1: Mounted on FR-4 P.C.B. With 0.9x1.5 mm copper pad areas (≈35 μm thick)

## RATINGS AND CHARACTERISTIC CURVES DSR03A THRU DSR03M


**Fig.1 Forward Current Derating Curve**

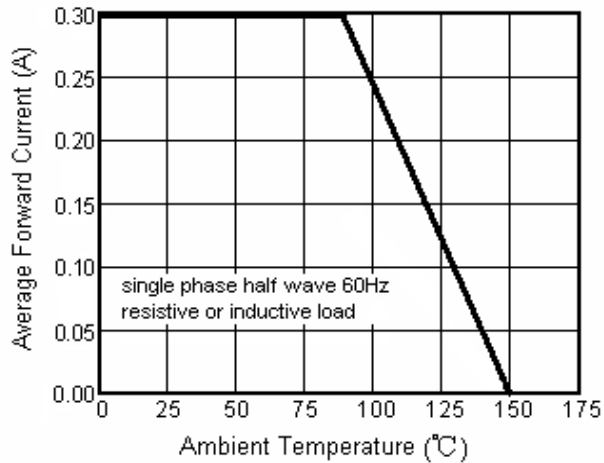

**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

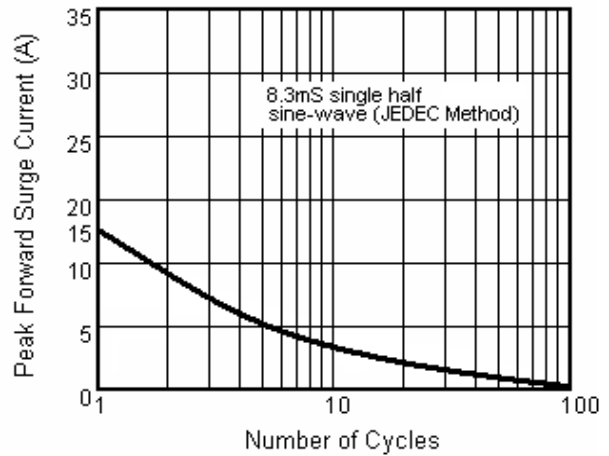

**Fig.3 Typical Instantaneous Forward Characteristics**

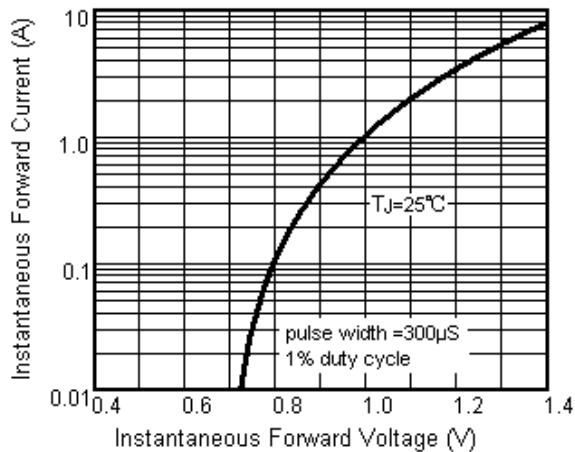

**Fig.4 Typical Reverse Characteristics**

