




SF81 - SF86

SUPER FAST RECOVERY RECTIFIER DIODES

VOLTAGE RANGE: 50 - 400V

CURRENT: 8.0 A




Features

- Low Leakage
- Low Forward Voltage Drop
- High Current Capability
- Super-fast Switching Speed < 35ns
- Plastic Material - UL Flammability Classification 94V-0
- Good for 200KHz Power Supplier

Mechanical Data

- Case: TO-220A, Molded Plastic
- Terminals: Plated Axial Leads, Solderable per MIL-STD-202 Method 208
- Approx Weight: 2.24 grams
- Mounting Position: Any

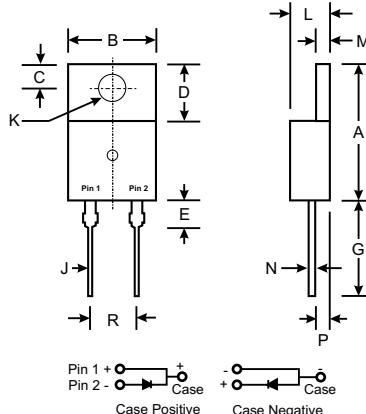

TO-220A		
Dim	Min	Max
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	—	6.25
G	12.70	14.73
H	2.29	2.79
J	0.51	1.14
K	3.53Ø	4.09Ø
L	3.56	4.83
M	1.14	1.40
N	0.30	0.64
P	2.03	2.92
R	4.83	5.33

All Dimensions in mm

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	SF81	SF82	SF83	SF84	SF85	SF86	UNIT		
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	Volts		
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	Volts		
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	Volts		
Maximum Average Forward Rectified Current At $T_c=105^\circ\text{C}$	$I_{(AV)}$	8.0						Amps		
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	125						Amps		
Maximum Instantaneous Forward Voltage at 8.0A	V_F	0.975			1.4		Volts			
Maximum DC Reverse Current at rated DC Blocking Voltage	I_R	$T_A = 25^\circ\text{C}$	10				μA			
			500							
Maximum Reverse Recovery Time Test conditions $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{RR}=0.25\text{A}$	t_{rr}	35			50		nS			
Typical Junction Capacitance (Note 2)	C_J	40			pF					
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	2.5			/W					
Operating Junction Temperature Range	T_J	(-55 to +150)								
Storage Temperature Range	T_{STG}	(-55 to +150)								

Notes: 1. Unit mounted on heatsink

2. measured at 1.0MHz and applied reverse voltage of 4.0V

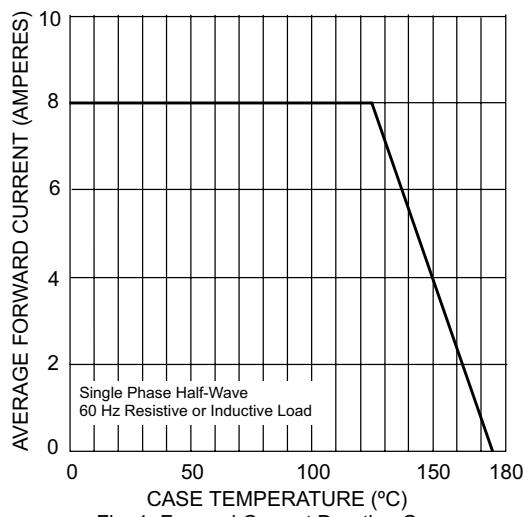


Fig. 1 Forward Current Derating Curve

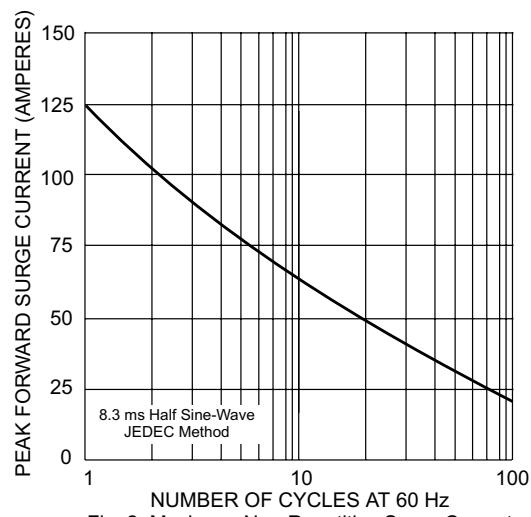


Fig. 2 Maximum Non-Repetitive Surge Current

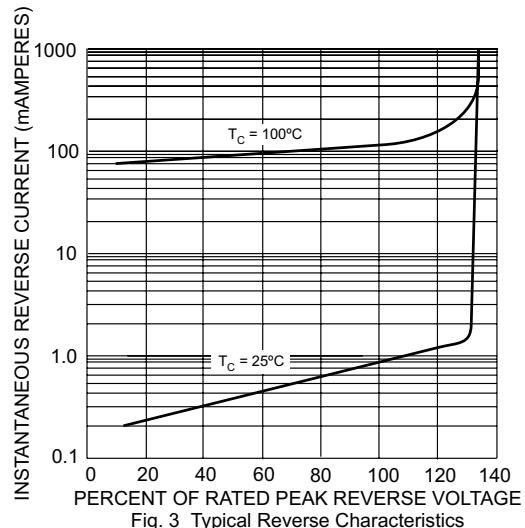


Fig. 3 Typical Reverse Characteristics

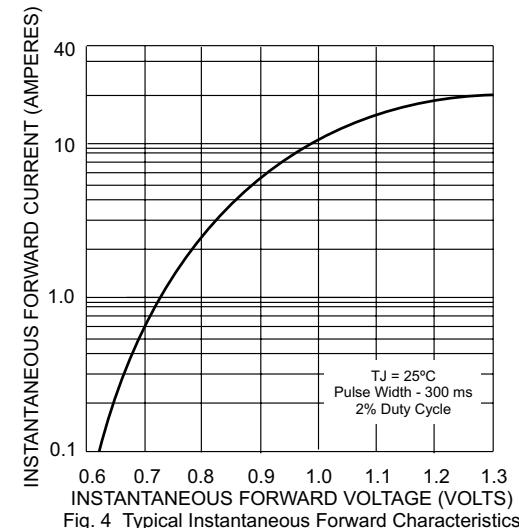


Fig. 4 Typical Instantaneous Forward Characteristics

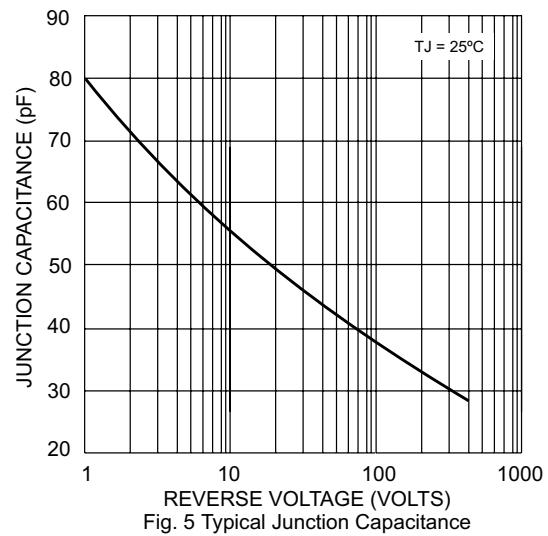


Fig. 5 Typical Junction Capacitance