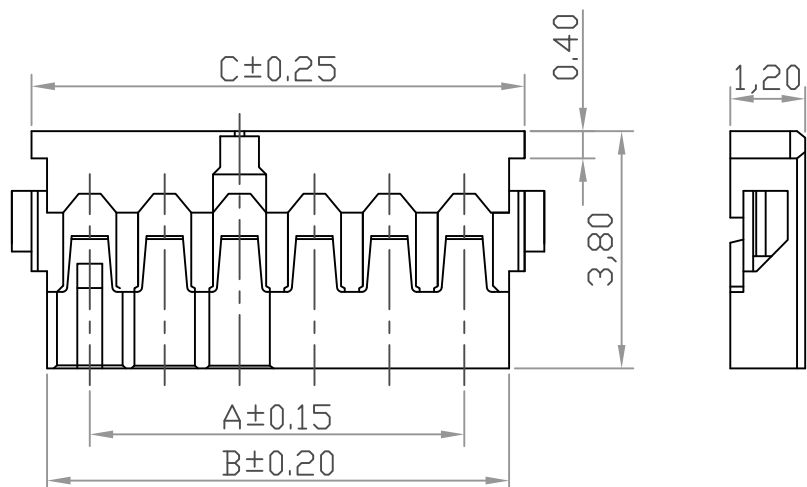
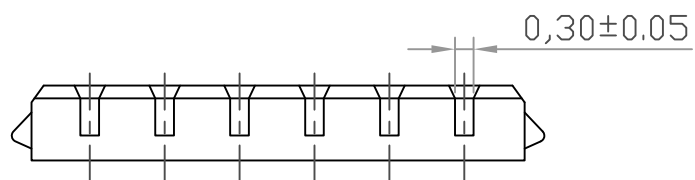


SPECIFICATIONS:

Current Rating:1.5A AC,DC

Voltage Rating:50V AC,DC

Temperature Range:-25°C ~ +85°C

Contact Resistance:20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage:500V AC/minute

Contacts:Brass,Tin-plated

Material:Nylon 66 UL94V-0,Color:Black

Circuits	Part No	Dimension mm		
		A	B	C
2	A1200H-2P	1.20	2.60	3.10
3	A1200H-3P	2.40	3.80	4.30
4	A1200H-4P	3.60	5.00	5.50
5	A1200H-5P	4.80	6.20	6.70
6	A1200H-6P	6.00	7.40	7.90
7	A1200H-7P	7.20	8.60	9.10
8	A1200H-8P	8.40	9.80	10.30
9	A1200H-9P	9.60	11.00	11.50
10	A1200H-10P	10.80	12.20	12.70
11	A1200H-11P	12.00	13.40	13.90
12	A1200H-12P	13.20	14.60	15.10
13	A1200H-13P	14.40	15.80	16.30
14	A1200H-14P	15.60	17.00	17.50
15	A1200H-15P	16.80	18.20	18.70

			JAT 东莞市君奥连接器有限公司 Dongguan JunAo Connector Co.Ltd			
			UNIT	SCALE	SHEET	TITLE: 1.20mm PITCH Wafer
			mm		1 of 1	
			DRAWN BY	APPROVED BY		
			闫诗	王海明		
			2012.12.04	2012.12.04		
			GENERAL	TOLERANCE		
			X.X±0.25	ANGLE±		
AO	NEW RELEASE	2012.12.04	X.XX±0.15			DRAW NO.: A1200H-NP
REV.	DESCRIPTION	DATE	X.XXX±0.08			