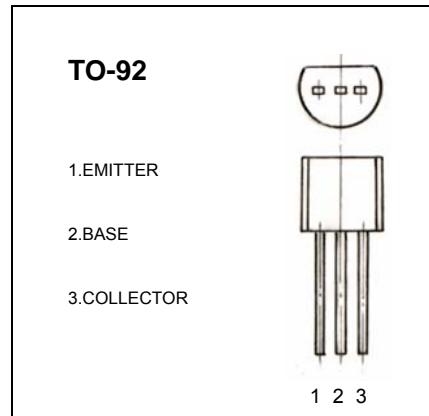


**S8050** TRANSISTOR (NPN)**FEATURES**

- Complimentary to S8550
- Collector current:  $I_C=0.5A$

**MAXIMUM RATINGS ( $T_A=25^\circ C$  unless otherwise noted)**

Symbol	Parameter	Value	Units
$V_{CBO}$	Collector-Base Voltage	40	V
$V_{CEO}$	Collector-Emitter Voltage	25	V
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current -Continuous	0.5	A
$P_c$	Collector Power Dissipation	0.625	W
$T_J$	Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature	-55-150	$^\circ C$

**ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C= 100\mu A, I_E=0$	40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C= 0.1mA, I_B=0$	25			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E= 100\mu A, I_C=0$	5			V
Collector cut-off current	$I_{CBO}$	$V_{CB}= 40 V, I_E=0$			0.1	$\mu A$
Collector cut-off current	$I_{CEO}$	$V_{CE}= 20 V, I_B=0$			0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB}= 5V, I_C=0$			0.1	$\mu A$
DC current gain	$h_{FE(1)}$	$V_{CE}= 1V, I_C= 50mA$	85		400	
	$h_{FE(2)}$	$V_{CE}= 1V, I_C= 500mA$	50			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500mA, I_B=50mA$			0.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=500mA, I_B=50mA$			1.2	V
Transition frequency	$f_T$	$V_{CE}= 6V, I_C=20mA$ $f = 30MHz$	150			MHz

**CLASSIFICATION OF  $h_{FE(1)}$** 

Rank	B	C	D	D3
Range	85-160	120-200	160-300	300-400