


VOLTAGE RANGE: 150 - 200V
CURRENT: 2.0 A


Features

- Schottky Barrier Chip
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- For Use in Low Voltage Application
- Guard Ring Die Construction
- Plastic Case Material has UL Flammability Classification Rating 94V-0



Mechanical Data

- Case: SMBF , Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.0018 ounces, 0.05grams

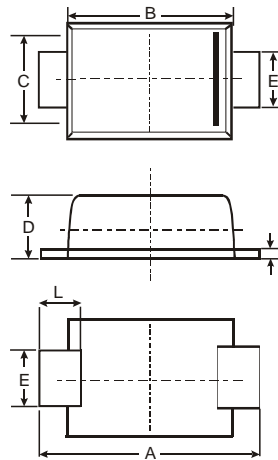

SMBF			
Dim	Min	Max	Typ
A	5.45	5.55	5.50
B	4.27	4.33	4.30
C	3.57	3.63	3.60
D	1.32	1.38	1.35
E	1.96	2.00	1.98
H	0.019	0.021	0.20
L	0.73	0.77	0.75
All Dimensions in mm			



Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	SK2150F	SK2200F	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	150	200	VOLTS
Maximum RMS voltage	V_{RMS}	105	140	VOLTS
Maximum DC blocking voltage	V_{DC}	150	200	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length(see fig.1)	$I_{(AV)}$	2.0		Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0		Amps
Maximum instantaneous forward voltage at 2.0A	V_F	0.85	0.95	Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	0.2 2.0		mA
Typical junction capacitance (NOTE 1)	C_J	80		pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	88		$^\circ\text{C/W}$
Operating junction temperature range	T_J	-65 to +150		$^\circ\text{C}$
Storage temperature range	T_{STG}	-65 to +150		$^\circ\text{C}$


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SK2150F THRU SK2200F


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

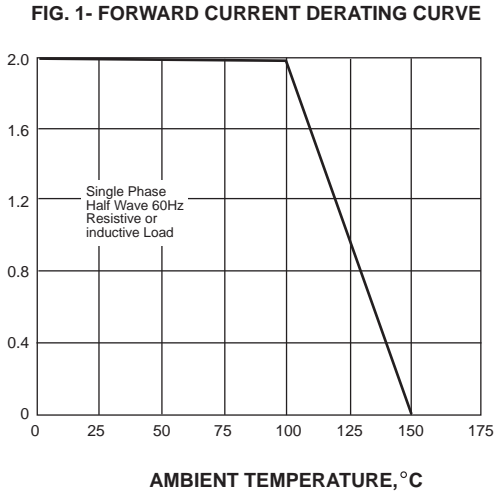


PEAK FORWARD SURGE CURRENT, AMPERES

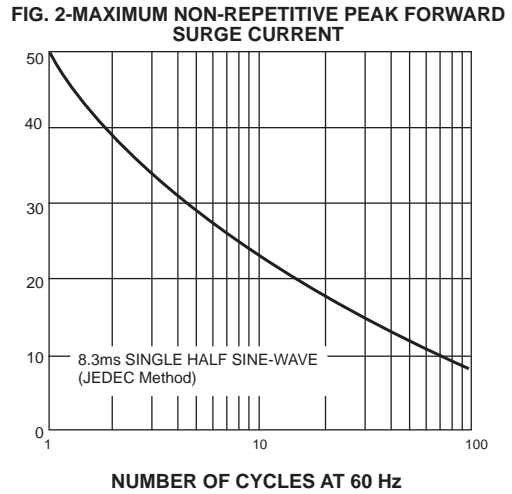


INSTANTANEOUS FORWARD CURRENT, AMPERES

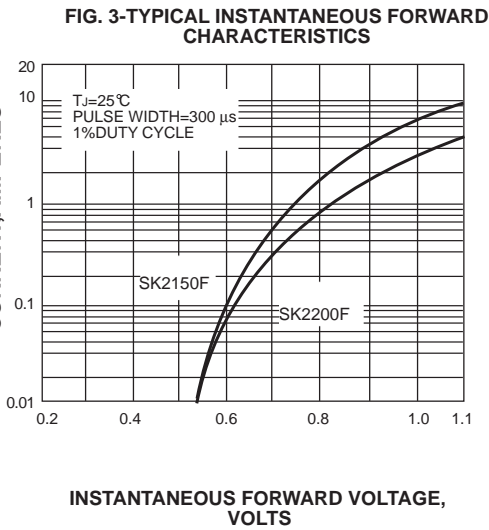

INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

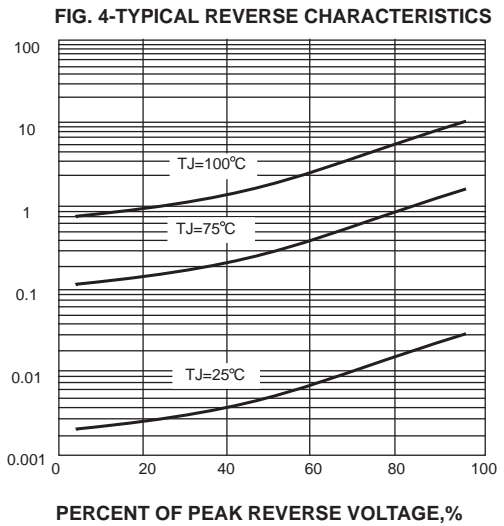

JUNCTION CAPACITANCE, pF

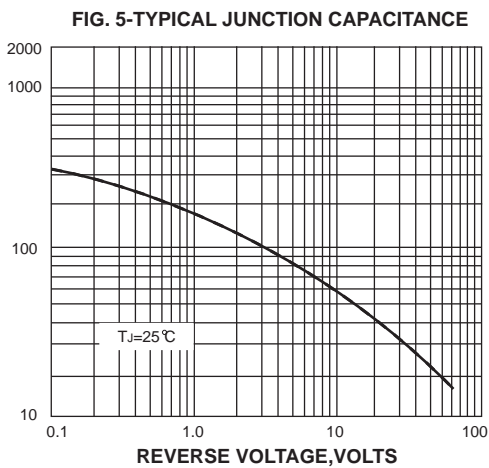

TRANSIENT THERMAL IMPEDANCE, °C/W

