

VOLTAGE RANGE: 50 - 1000V





CURRENT: 0.3 A

Features

- Low profile space
- Ideal for automated placement
- Glass passivated chip junctions
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering
260°C/10 seconds at terminals

Mechanical Data

- Case: JEDEC SOD-123FL molded plastic body over passivated chip
- Terminals : Plated axial leads,
- solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight: 0.0007 ounce, 0.02 grams

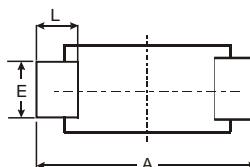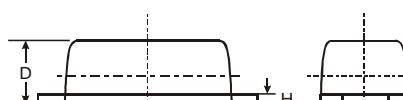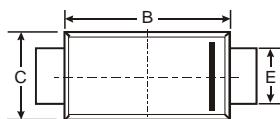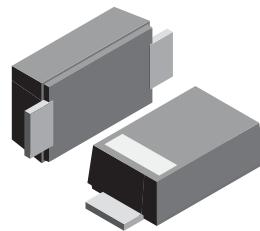

SOD-123FL			
Dim	Min	Max	Typ
A	3.58	3.72	3.65
B	2.72	2.78	2.75
C	1.77	1.83	1.80
D	1.02	1.08	1.05
E	0.097	1.03	1.00
H	0.13	0.17	0.15
L	0.53	0.57	0.55

All Dimensions in mm

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	DSR 0.3A	DSR 0.3B	DSR 0.3D	DSR 0.3G	DSR 0.3J	DSR 0.3K	DSR 0.3M	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_A=65^\circ\text{C}$ (NOTE 1)	I_{AV}					0.3			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) $T_L=25^\circ\text{C}$	I_{FSM}				15.0				V
Maximum instantaneous forward voltage at 0.3A	V_F				1.1				V
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R				5.0	50.0			μA
Typical junction capacitance (NOTE 2)	C_J				4				pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$				220				K/W
Operating junction and storage temperature range	$T_J \cdot T_{STG}$				-55 to +150				°C

Note1: Mounted on FR-4 P.C.B. With 0.9x1.5 mm copper pad areas ($\approx 35 \mu\text{m}$ thick)

RATINGS AND CHARACTERISTIC CURVES DSR0.3A THRU DSR0.3M

Fig.1 Forward Current Derating Curve

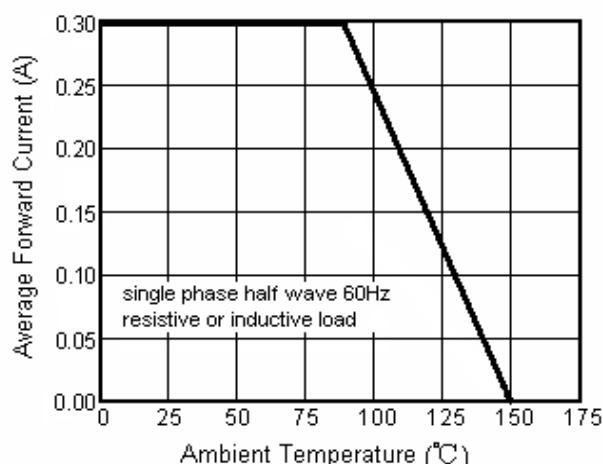


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

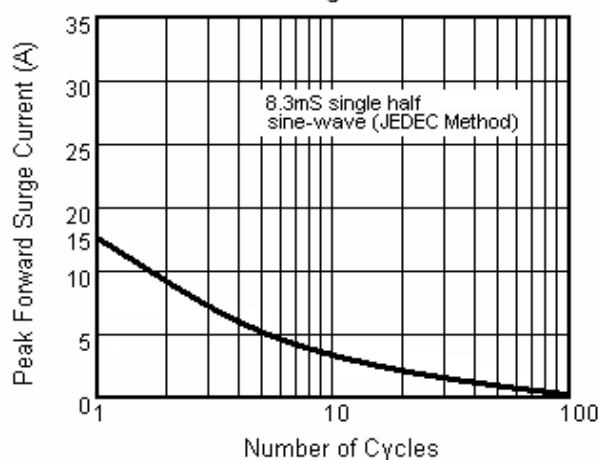


Fig.3 Typical Instantaneous Forward Characteristics

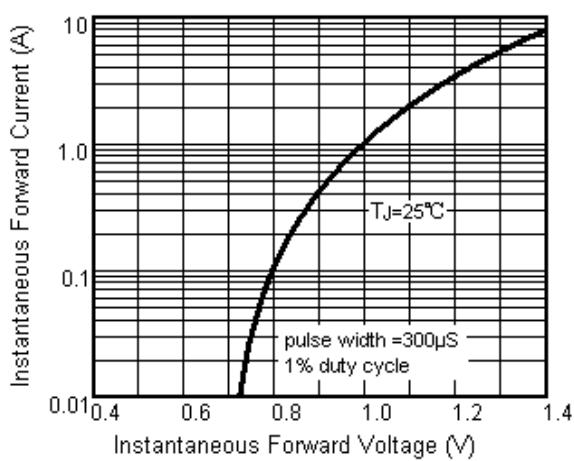


Fig.4 Typical Reverse Characteristics

