





VOLTAGE RANGE: 50 - 1000V
CURRENT: 0.7A

Features

- Glass passivated device
- Ideal for surface mounted applications
- Low reverse leakage
- Metallurgically bonded construction
- High temperature soldering guaranteed:
- 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

- Case: SOD-123FL
plastic body over passivated junction
- Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight: 0.0007 ounce, 0.02 grams



SOD-123FL			
Dim	Min	Max	Typ
A	3.58	3.72	3.65
B	2.72	2.78	2.75
C	1.77	1.83	1.80
D	1.02	1.08	1.05
E	0.097	1.03	1.00
H	0.13	0.17	0.15
L	0.53	0.57	0.55
All Dimensions in mm			

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	RS07A	RS07B	RS07D	RS07G	RS07J	RS07K	RS07M	Unit
	Marking	F1	F2	F3	F4	F5	F6	F7	
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at T _A =65°C (NOTE 1)	I _(AV)	0.7							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) T _L =25°C	I _{FSM}	25.0							A
Maximum instantaneous forward voltage at 1.0A	V _F	1.15							V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R	10.0 50.0							μA
Maximum reverse recovery time (NOTE 2)	t _{rr}	150			250		500		ns
Typical junction capacitance (NOTE 3)	C _J	4							pF
Typical thermal resistance (NOTE 4)	R _{θJA}	180							K/W
Operating junction and storage temperature range	T _J , T _{STG}	-50 to +150							°C


- Note:**
1. Averaged over any 20ms period.
 2. Measured with I_F=0.5A, I_R=1A, I_{rr}=0.25A.
 3. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 4. Thermal resistance junction to ambient, 6.0 mm² copper pads to each terminal.



RATINGS AND CHARACTERISTIC CURVES RS07A THRU RS07M


INSTANTANEOUS FORWARD CURRENT

FIG.1 – TYPICAL FORWARD CHARACTERISTIC

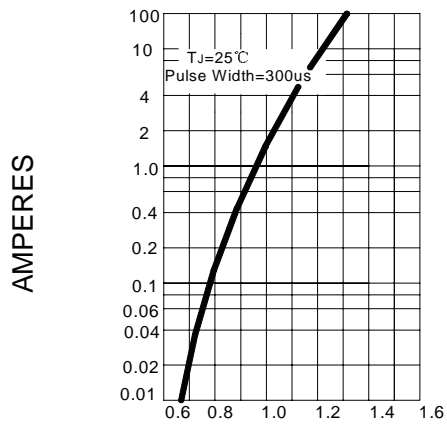


INSTANTANEOUS FORWARD VOLTAGE, V

FIG.2 – TYPICAL JUNCTION CAPACITANCE

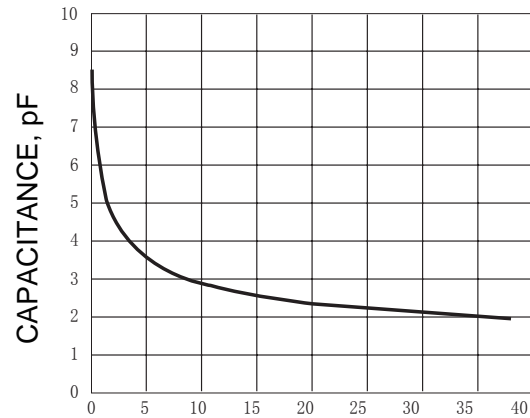


REVERSE VOLTAGE, VOLTS

FIG.3 – TYPICAL INSTANTANEOUS REVERSE CHARACTERISTICS

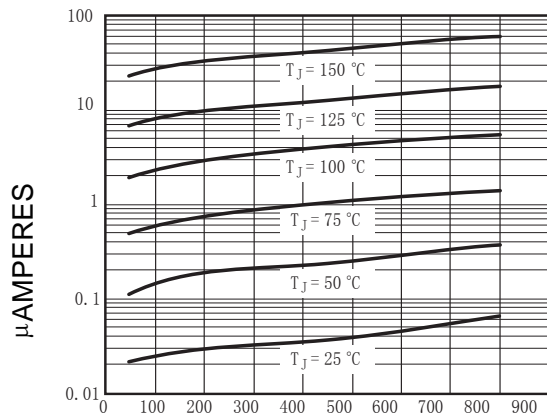

INSTANTANEOUS REVERSE VOLTAGE, V

FIG.4 – FORWARD DERATING CURVE

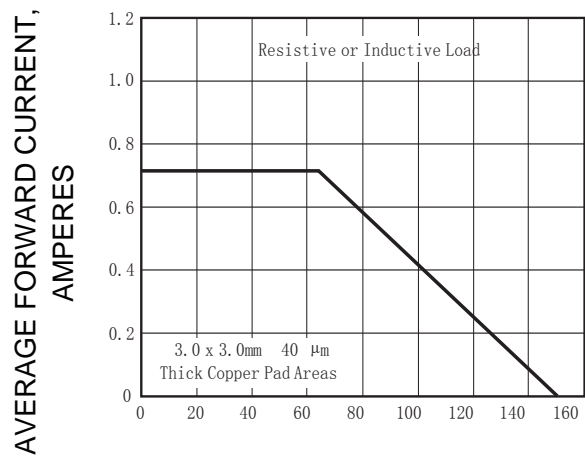

AVERAGE FORWARD CURRENT, AMPERES

AMBIENT TEMPERATURE, °C